

Normal Incidence Reflection

Reading assignment

Paul, Whites, and Nasar, 5.7, 6.7


Problem 1 - Normal incidence reflection - conductors

A 10 GHz plane wave has an electric field magnitude of 100 V/m and propagates in the \mathbf{a}_z direction through a perfect dielectric with $\epsilon_r = 9$. \mathbf{E} is in the \mathbf{a}_x direction.

- What are the incident \mathbf{E} and \mathbf{H} phasors?
- At $z = 0$, the wave strikes a perfect conductor. What are the reflected \mathbf{E} and \mathbf{H} phasors?
- Use the boundary conditions to find the surface current density in the conductor.
- Draw the standing wave pattern for \mathbf{E} and \mathbf{H} (include numbers for amplitude and position).
- Simulate this case with `sing_bnd.m` by using a large imaginary dielectric for region 2.
- Calculate the total \mathbf{E} and \mathbf{H} . (phasor & time domain form).

Problem 2 - Normal incidence reflection - dielectrics

The same wave as in problem 1 strikes a dielectric-air boundary at $z=0$ as shown below.

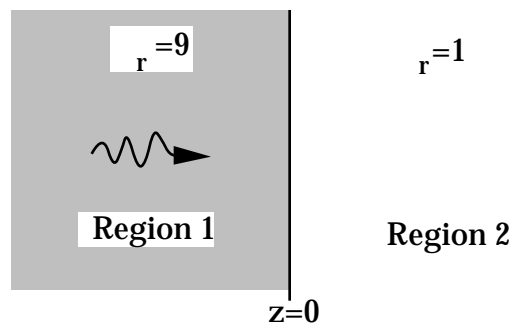


- Find the reflection and transmission coefficients.
- What are the reflected and transmitted electric field phasors?
- What are the reflected and transmitted \mathbf{H} phasors? What is H_t/H_i ?
- What is the standing wave ratio in the dielectric? Sketch the standing wave pattern for \mathbf{E} and \mathbf{H} . Run `sing_bnd.m` for this problem.
- What is the average power density of the incident, reflected, and transmitted waves?

Normal Incidence Reflection

Problem 3 - Normal incidence - multiple boundaries

A 10 GHz radar transmitter is used in the configuration shown below. Note that the radome-outside air boundary is identical to the boundary examined in Problem 2.

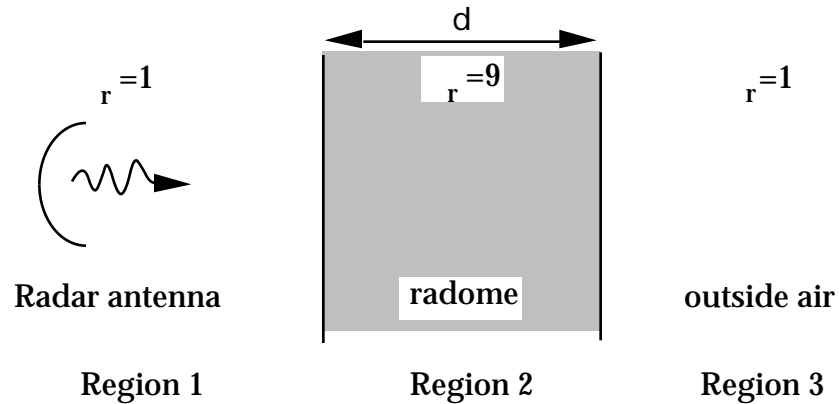

- What is $|\mathbf{E}|/|\mathbf{H}|$ at the $z=0$ boundary of Problem 2? (equivalent to the region 2-3 boundary in this problem). Compare it with the value in air.
- Now refer to the full radome problem. Where can you put the left boundary so that $|\mathbf{E}|/|\mathbf{H}|$ in the radome matches that in the air on the left? For mechanical reasons, the radome must be more than 2 cm thick.
- What is Γ for this value of d ?
- What is Γ if d is 0.2 mm thinner than designed?